



Isometric Overall

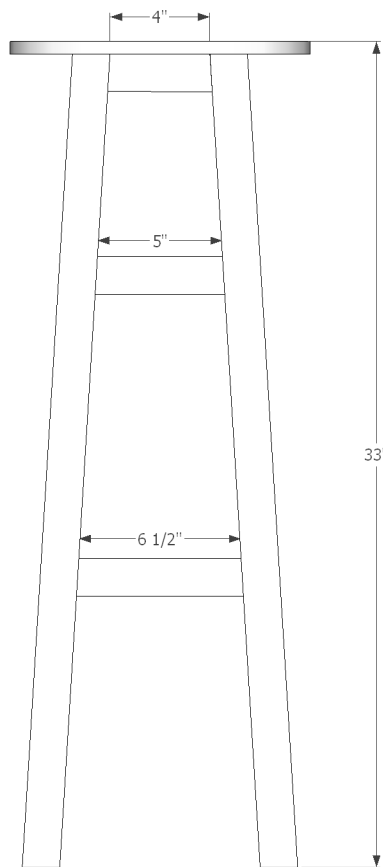


Front Overall

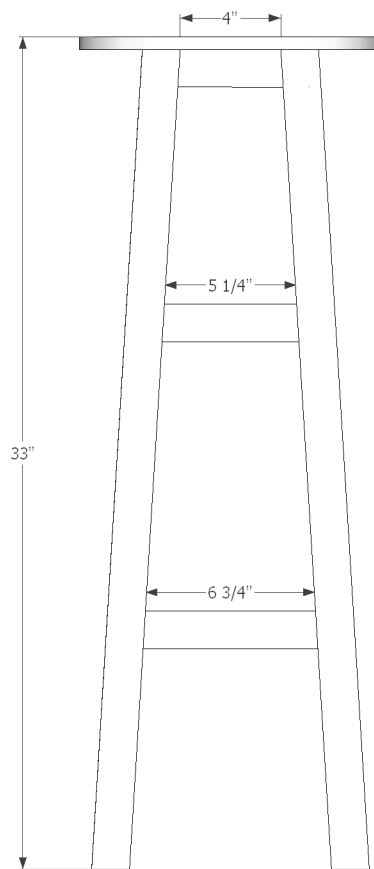


Left Side Overall

Mark the tallest corner of your stool legs as you cut them.
This will make it easier to see which corner goes towards
the inside of your stool when assembling.

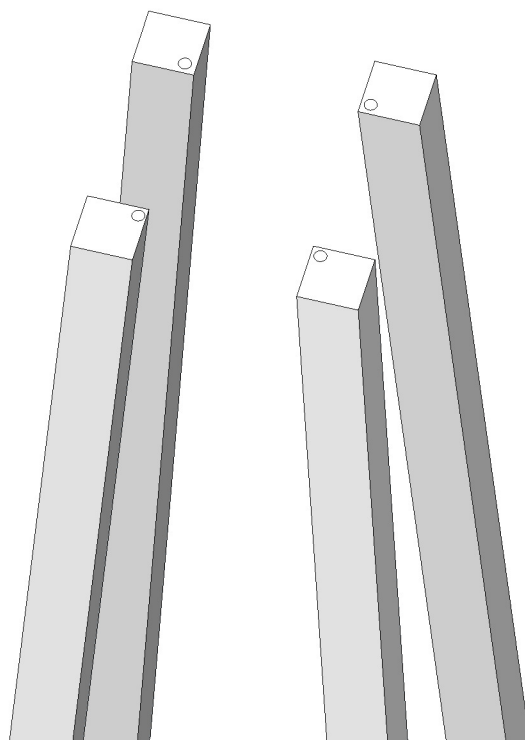


Step 1.

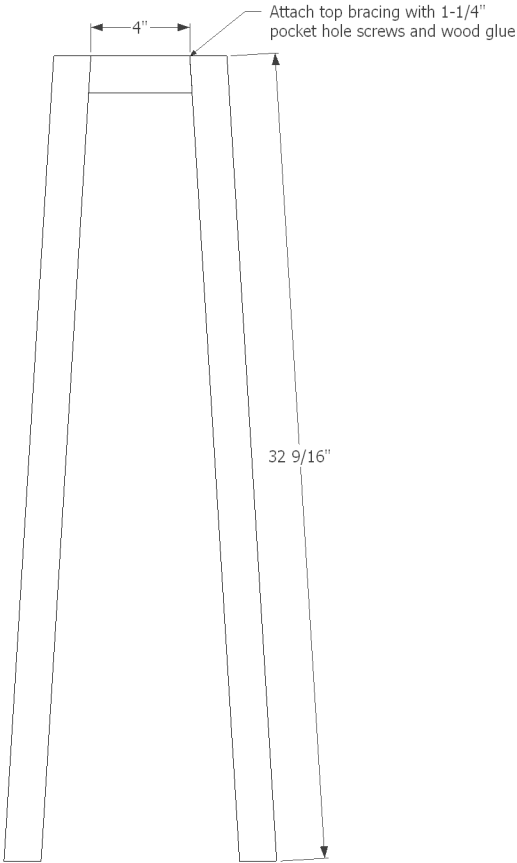


Step 2.

Add 5" brace and 6-1/2" brace. These will split the stool approximately into thirds. Repeat for a second frame. You should now have two leg frames.

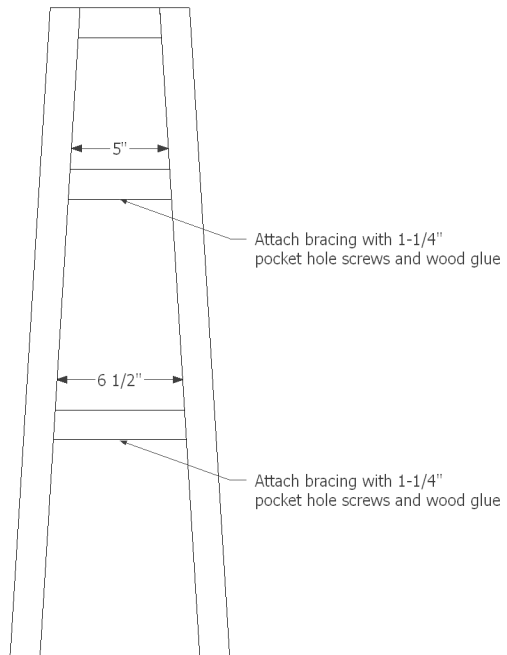


Step 3.

Connect leg frames with 4" top braces.

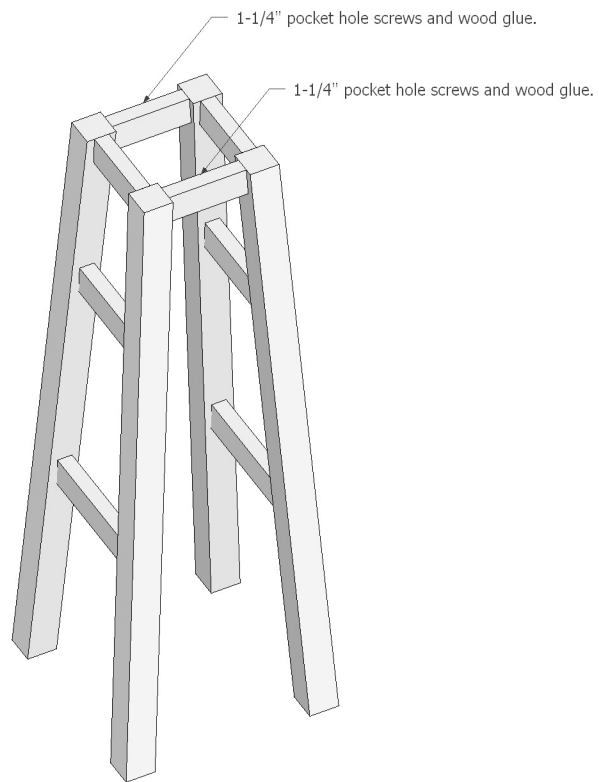


Step 4.

Add 5-1/4" brace and 6-3/4" brace between leg frames. These will be offset about 1" below the first set of braces. Don't worry about exact placement. Simply slide them to where they fit snugly against the stool legs.

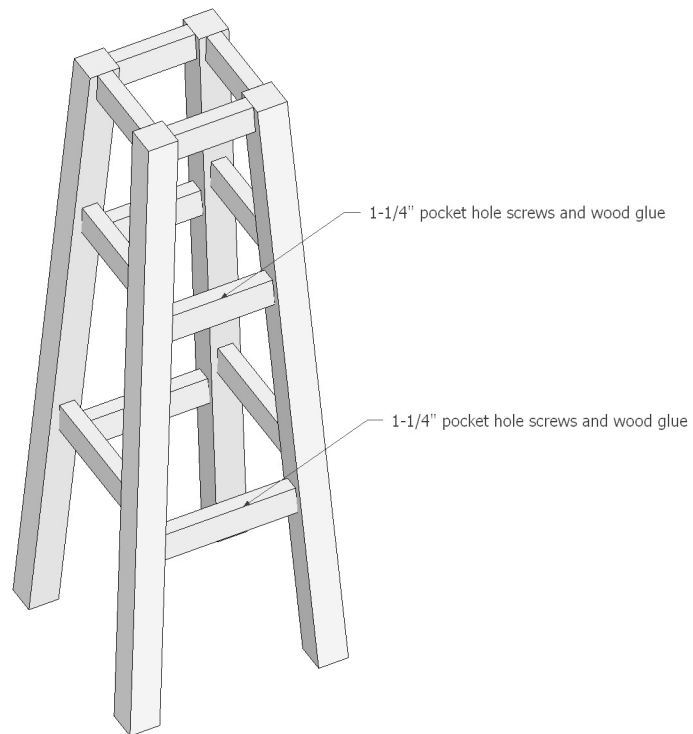

Step 4.

Direct side view after completing Step 4.

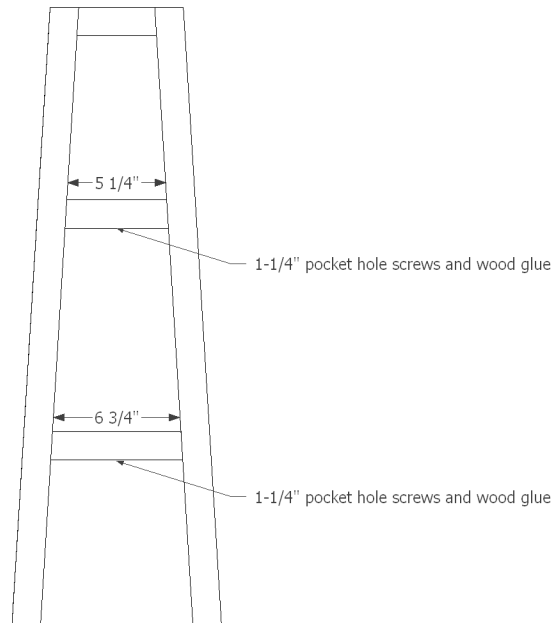

Step 5.

Attach the top of the stool to the frame.

